



NVG Fireworm Product Specification

NVG Fireworm (Portable illuminated overt/covert marking system)

Comprising: Cable Drum containing all switching, Drive, Power and Control Systems, IP 65 rated.
Either 50, 100 or 300 meters of toughened illumination material.

Pt No: NVG 204/04-50m

Illumination Durations at 50 meters:

Full Illumination mode: 32 hours
NVG Illumination: 106 hours

Tensile strength: 130 kilos

Cable Diameter: 4mm

Power output:

Voltage: 12V Nominal
14.4V Max

Recharge information:

Recharge Time: 2.5 hours
Number of recharges: 500

Dimensions & Weights:

Weight: 4.5Kg

Pt No: NVG 206/01-100m

Illumination Durations at 100 meters:

Full Illumination mode: 20 hours
NVG Illumination: 62 hours

Tensile strength: 130 kilos

Cable Diameter: 4mm

Power output:

Voltage: 12V Nominal
14.4V Max

Recharge information:

Recharge Time: 2.5 hours
Number of recharges: 500

Dimensions & Weights:

Weight: 7Kg

Pt No: NVG 207/01-300m

Illumination Durations at 300 meters:

Full Illumination mode: 7 hours
NVG Illumination: 30 hours

Tensile strength: 130 Kilos

Cable Diameter: 4mm

Power output:

Voltage: 12V Nominal
14.4V Max


Recharge information:

Recharge Time: 2.5 hours
Number of recharges: 500

Dimensions & Weights:


Weight: 10Kg

Dimensions

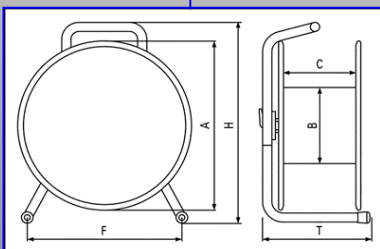


A = 235mm B = 135mm
C = 110mm F = 210mm
H = 300mm T = 180mm

Dimensions

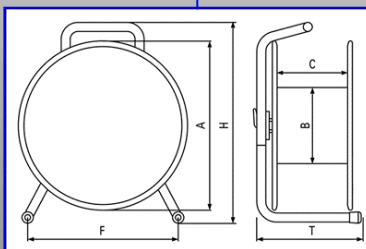

A = 235mm B = 135mm
C = 110mm F = 210mm
H = 300mm T = 180mm

Dimensions

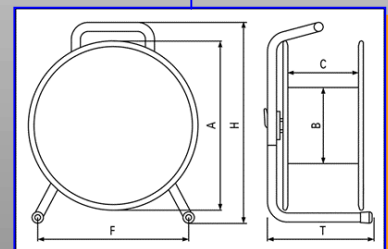

A = 310mm B = 170mm
C = 112mm F = 262mm
H = 370mm T = 224mm

Linear Guidance Illumination

Townsend Court, Poulshot, Devizes,
Wiltshire, SN10 1SD
Tel: 0845-2255603.
Fax: 0845 2255604
Email info@lineargi.co.uk
Web: www.lineargi.co.uk

Other Products

Fireworm: Portable marking system
Fireworm MLMS: Modular Lane Marking System
TMM 100: Overt/Covert Mine Markers
Hell-light: Tactical Landing lights
Firesnake: Illuminated Diving Line
Firesub: Submersible Overt/Covert Marking System